

OV9718 720p product brief



Native High Definition OV9718 CameraChip™



available in
a lead-free
package

The 1/4-inch OV9718 is a native high-definition (HD) image sensor capable of capturing high quality 720p video at 60 frames per second (fps). Built on an enhanced OmniPixel3-HS™ pixel, the OV9718 combines excellent low-light performance of 3300 mV/lux-sec with fast frame rates, making it ideally suited for telepresence and high-end security applications.

The sensor's new and improved OmniPixel3-HS pixel architectures offers improved dynamic range, better low-light sensitivity and enhanced signal-to-noise ratio (SNR) performance compared to the previous generation sensor. The OV9718's 12-bit RGB RAW

output capability provides improved dynamic range. In addition, the embedded sequential line- or frame-based HDR features allow higher dynamic range for high-contrast scenes using an external ISP. Its fast frame rate minimizes latency delay, resulting in quick response time for interactive real-time communication applications.

The OV9718 features a standard 2-lane MIPI/LVDS interface and comes in a 49-pin CSP3 package.

Find out more at www.ovt.com.


Applications

- Security
- Telepresence

Product Features

- automatic black level calibration (ABLC)
- programmable controls for frame rate, mirror and flip, cropping and windowing
- image quality controls: lens correction and defective pixel canceling
- supports output formats: 8/10/12-bit RAW RGB (MIPI/LVDS)
- supports horizontal and vertical sub-sampling
- supports image sizes: 1280x800, 640x400, 320x200, and 160x100
- fast mode switching
- support 2x2 binning
- standard serial SCCB interface
- two-lane MIPI/LVDS serial output interface
- embedded 256 bits one-time programmable (OTP) memory for part identification, etc.
- on-chip phase lock loop (PLL)
- programmable I/O drive capability
- built-in 1.5V regulator for core
- support alternate frame HDR/line HDR

OV9718




Ordering Information

- OV09718-A49A-Z (color, lead-free, 49-pin CSP3)

Product Specifications

- active array size: 1296 x 812
- power supply:
 - core: 1.5 VDC ±5%
 - analog: 2.6 - 3.0V
 - I/O: 1.7 - 3.0V
- power requirements:
 - active: 95 mA
 - standby: 30 μA
 - XSHUTDOWN: 5 μA
- temperature range:
 - operating: -30°C to 85°C junction temperature
 - stable image: 0°C to 50°C junction temperature
- output formats: 12-bit RGB RAW
- lens size: 1/4"
- lens chief ray angle: 0°
- input clock frequency: 6 - 27 MHz
- max S/N ratio: 39 dB
- dynamic range: 73 dB @ 8x gain
- maximum image transfer rate:
 - 1280x800: 60 fps
- sensitivity: 3.3 V/lux-sec
- scan mode: progressive
- maximum exposure interval: 800 x t_{ROW}
- pixel size: 3.0 μm x 3.0 μm
- dark current: 2.3 mV/s @ 50°C junction temperature
- image area: 3936 μm x 2460 μm
- package dimensions: 6110 μm x 4930 μm

Functional Block Diagram

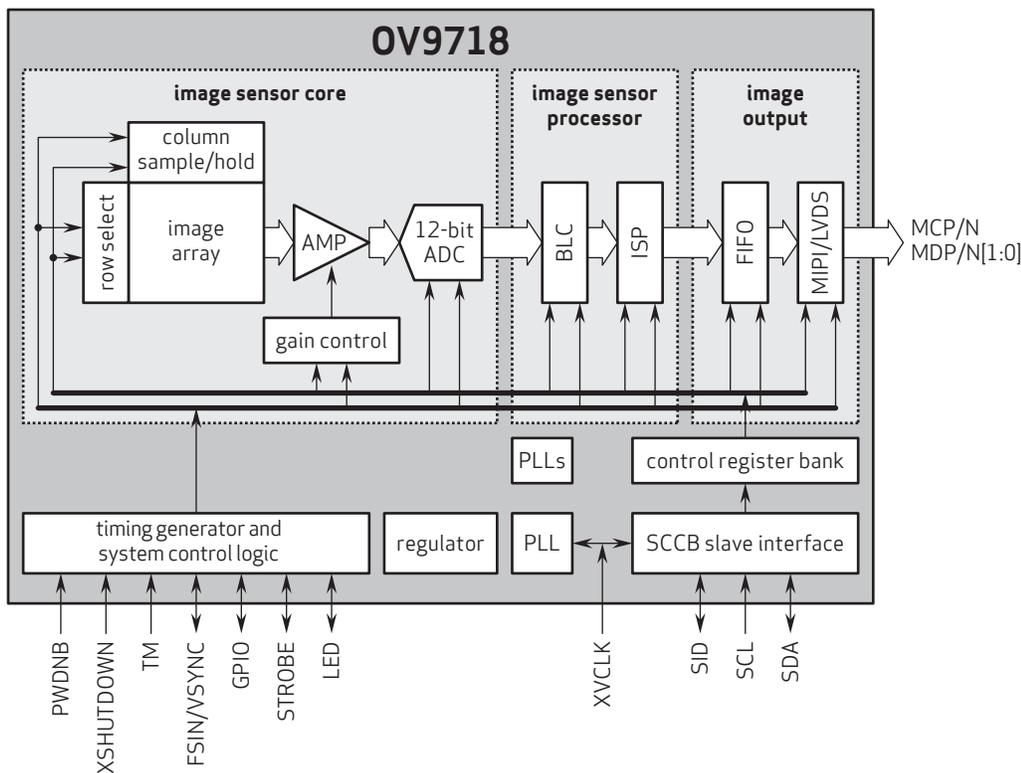

4275 Burton Drive
Santa Clara, CA 95054
USA

Tel: +1 408 567 3000
Fax: +1 408 567 3001
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo and OmniPixel are registered trademarks of OmniVision Technologies, Inc. OmniBSI-Z is a trademark of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.

OmniVision