


OV7261 VGA product brief



Ultra-Compact Global Shutter Sensor for Automotive Applications

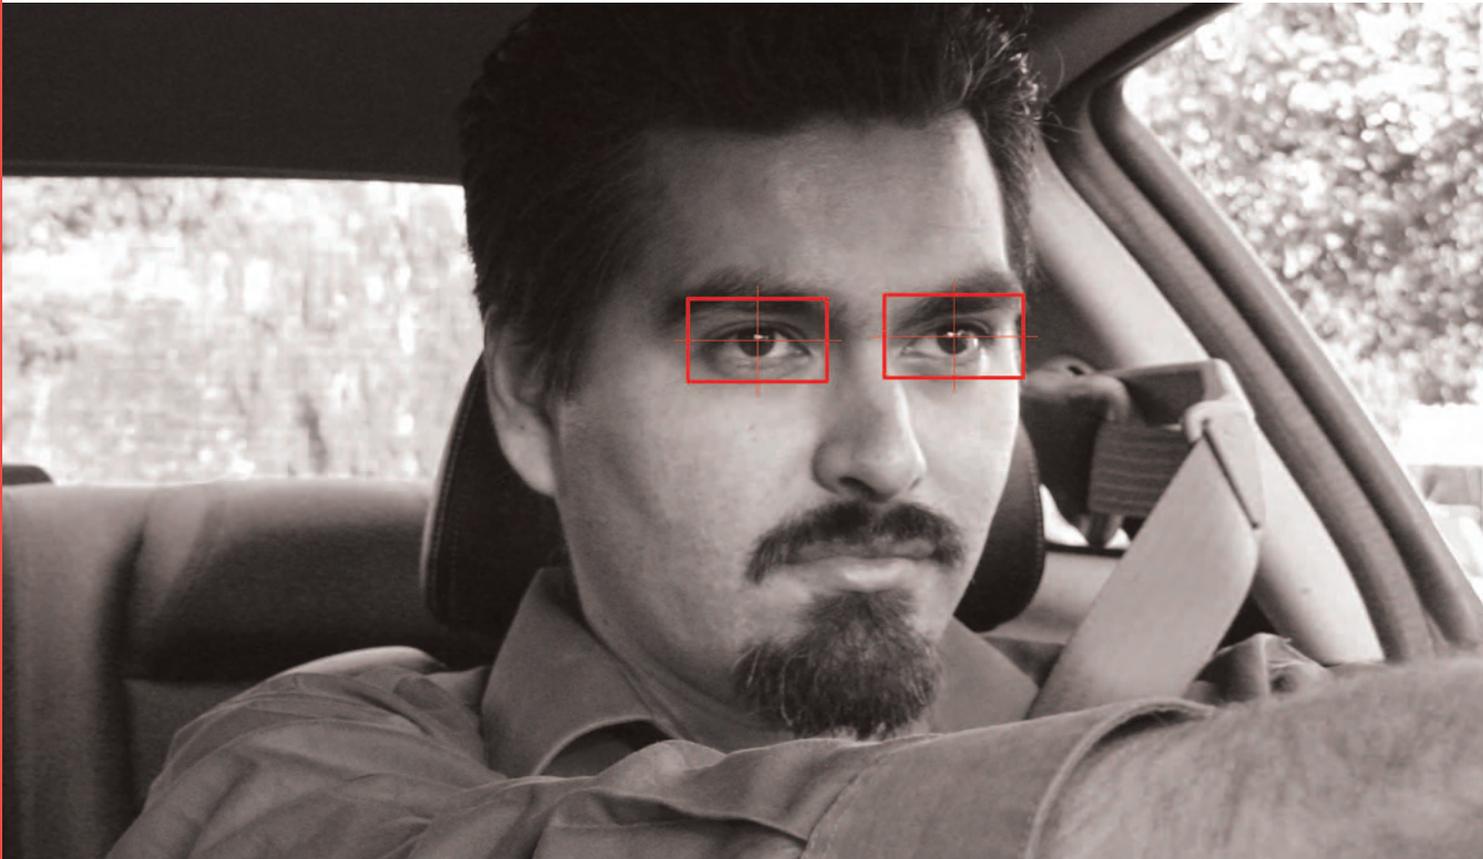

available in
a lead-free
package

OmniVision's OV7261 is a 3-micron global shutter image sensor for driver monitoring systems in automotive applications. The ultra-compact and power-efficient OV7261 features high quantum efficiency at near-infrared wavelengths, bringing significant LED illuminator power reduction for advanced features in vehicles such as gesture control and driver drowsiness and distraction detection.

Built on OmniVision's market-proven global shutter technology, the OV7261 enables accurate fast motion capture and stereo vision pixel-level synchronization for

driver monitoring systems. The OV7261 captures 640 x 480 (VGA) resolution up to 100 frames per second (fps) and delivers 10-bit RAW image output.

The OV7261 comes in an ultra-compact AEC-Q100 Grade 2-qualified 3.9 x 3.4 mm chip scale package.

Find out more at www.ovt.com.




Applications

- Occupant Detection
- Driver Monitor
- Vehicle Entry
- Stereo Vision
- Gesture Control

Product Features

- 3 μm x 3 μm pixel with OmniPixel3-GS™ technology
- automatic black level calibration (ABLC)
- programmable controls for frame rate, mirror and flip, cropping and windowing
- support output formats: 8/10-bit RAW
- support for image sizes:
 - 640 x 480
 - 320 x 240
 - 160 x 120
- fast mode switching
- supports horizontal and vertical 2:1 and 4:1 monochrome subsampling
- supports 2x2 monochrome binning
- one-lane MIPI serial output interface
- one-lane LVDS serial output interface
- embedded 256 bits of one-time programmable (OTP) memory for part identification
- two on-chip phase lock loops (PLLs)
- built-in 1.5V regulator for core
- PWM
- built-in strobe control

OV7261




Ordering Information

- **OV07261-N35Y-MA** (B&W, lead-free) 35-pin a-CSP™ packed in tray with protective film, tab in top right direction
- **OV07261-N35Y-NA** (B&W, lead-free) 35-pin a-CSP™ packed in tape & reel with protective film, tab in top right direction

Product Specifications

- **active array size:** 640 x 480
- **power supply:**
 - analog: 2.8V (nominal)
 - core: 1.5V (optional)
 - I/O: 1.8V (nominal)
- **power requirements:**
 - active: 117 mW @ 100 fps, VGA output
 - standby: 15 μA for AVDD, 40 μA for DOVDD without input clock, 700 μA for DOVDD with input clock
 - XSHUTDOWN: 5 μA for AVDD, 5 μA for DOVDD
- **temperature range:**
 - operating: -40°C to +105°C ambient temperature and -40°C to +125°C junction temperature
- **output interface:** 1-lane MIPI/LVDS serial output
- **output formats:** 10-bit B&W RAW
- **lens size:** 1/7.5"
- **input clock frequency:** 6 - 27 MHz
- **lens chief ray angle:** 29° non-linear
- **max S/N ratio:** 38 dB
- **dynamic range:** 69.6 dB @ 8x gain
- **maximum image transfer rate:**
 - 640 x 480: 100 fps
- **sensitivity:**
 - 10,800 mV/($\mu\text{W}\cdot\text{cm}^2\cdot\text{sec}$) @ 850 nm
- **scan mode:** progressive
- **maximum exposure interval:** 502 x t_{row}
- **pixel size:** 3 μm x 3 μm
- **image area:** 1968 μm x 1488 μm
- **package dimensions:**
 - a-CSP™: 3910 μm x 3410 μm

Functional Block Diagram

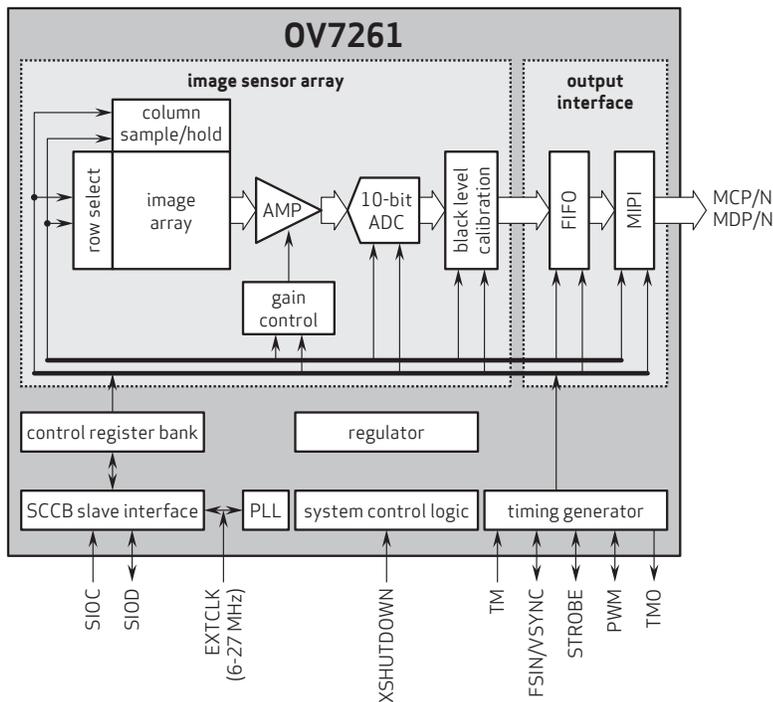

4275 Burton Drive
Santa Clara, CA 95054
USA

Tel: + 1 408 567 3000
Fax: + 1 408 567 3001
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision and the OmniVision logo are registered trademarks of OmniVision Technologies, Inc. OmniPixel3-GS and a-CSP are trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



OmniVision