

# OV01A10 1-megapixel product brief



## New 720p Image-Sensor Family Combines Compact Form Factor with High Performance for Ultra-Thin Mobile Devices



available in  
a lead-free  
package

The OV01A family of image sensors is built on OmniVision's most advanced 1.12-micron PureCel®Plus stacked-die architecture to deliver best-in-class performance while maintaining an extremely small footprint. By enabling a camera module size of just 2.5 mm in the "y" dimension and less than 2 mm in the "z" dimension, the OV01A image-sensor family is ideal for space-constrained applications such as notebooks and mobile devices with thin bezels.

To suit the performance requirements of different mobile applications, the OV01A is available in three versions: the OV01A10 Bayer color sensor, the OV01A1B monochrome infrared (IR) sensor and the OV01A1S RGB-IR sensor.

Key highlights of each sensor:

- OV01A10: Delivers excellent Bayer color imaging throughout the visible light spectrum
- OV01A1B: Optimizes near-infrared (NIR) quantum efficiency for biometric imaging
- OV01A1S: Combines RGB and IR imaging capabilities in a single sensor

The sensors can output 720p high definition (HD) video at 60 frames per second (fps), 1280 x 800 resolution video at 60 fps, or VGA video at 90 fps.

Find out more at [www.ovt.com](http://www.ovt.com).




## Applications

- Notebooks / PCs
- Tablets, Detachables, and 2-in-1s
- Wearables
- Smartphones and Feature Phones

## Product Features

- 1.116  $\mu\text{m}$  x 1.116  $\mu\text{m}$  pixel
- optical size of 1/11"
- 32° CRA
- 1MP at 60 fps
- programmable controls for:
  - frame rate
  - mirror and flip
  - cropping
  - windowing
- supports images sizes:
  - 1MP (1280x800)
  - 720p (1280x720)
  - VGA (640x480), and more
- support for output formats: 10-bit RGB RAW
- 32 bytes of embedded one-time programmable (OTP) memory for customer use
- two-wire serial bus control (SCCB)
- MIPI serial output interface (1-lane)/LVDS
- two on-chip phase lock loops (PLLs)
- 2x binning support
- image quality controls:
  - defect pixel correction
  - automatic black level calibration
- suitable for module size of 4 x 3.5 x 2 mm

# OV01A10




## Ordering Information

- **OV01A10-GA5A**  
(color, chip probing, 150  $\mu\text{m}$  backgrinding, reconstructed wafer)
- **OV01A1B-GA5A**  
(B&W, chip probing, 150  $\mu\text{m}$  backgrinding, reconstructed wafer)
- **OV01A1S-GA5A**  
(RGB-Ir, chip probing, 150  $\mu\text{m}$  backgrinding, reconstructed wafer)

## Technical Specifications

- **active array size:** 1280 x 800
- **maximum image transfer rate:**
  - 1MP (1280x800): 60 fps
  - VGA (640x480): 90 fps
- **power supply:**
  - analog: 2.7 - 3.0V (2.8V nominal)
  - core: 1.14 - 1.26V (1.2V nominal)
  - I/O: 1.7 - 1.9V (1.8V nominal)
- **power requirements:**
  - active: 82.2 mW
  - standby: 0.5 mA
  - XSHUTDOWN: 2  $\mu\text{A}$
- **temperature range:**
  - operating: -30°C to +85°C junction temperature
  - stable: 0°C to +60°C junction temperature
- **output formats:**
  - OV01A10: 8/10-bit RGB RAW
  - OV01A1B: 8/10-bit RAW
  - OV01A1S: 8/10-bit RGB-Ir (4x4 pattern)
- **output interface:** 1-lane MIPI serial output/LVDS
- **lens size:** 1/11"
- **lens chief ray angle:** 32° non-linear
- **pixel size:** 1.116  $\mu\text{m}$  x 1.116  $\mu\text{m}$
- **image area:** 1446.34  $\mu\text{m}$  x 910.66  $\mu\text{m}$

## Functional Block Diagram

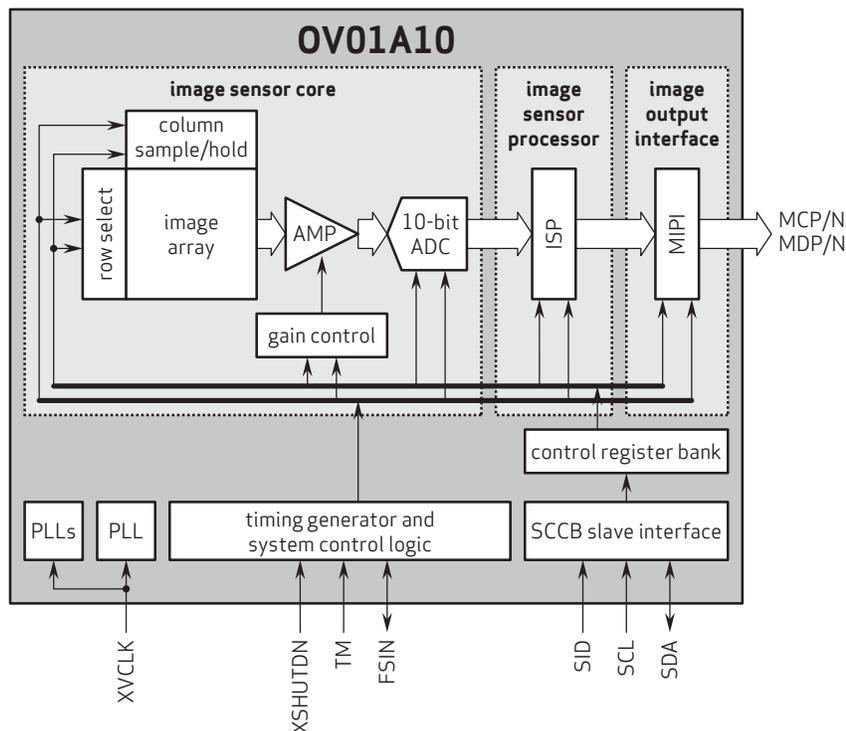

4275 Burton Drive  
Santa Clara, CA 95054  
USA

Tel: + 1 408 567 3000  
Fax: + 1 408 567 3001  
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo and PureCel are registered trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



OmniVision