

# OG01A1B 1.3MP product brief



## BSI Global Shutter Sensor with Nyxel® Technology Provides Superior Near-Infrared Performance for Advanced Consumer and Industrial Applications



available in a lead-free package

OmniVision's OG01A is a backside-illuminated (BSI) global shutter (GS) image sensor with a pixel size of 2.2 microns. It combines OmniVision's PureCel®Plus-S pixel technology and Nyxel® near-infrared (NIR) technology to enable optimal performance and precision along with industry-leading NIR quantum efficiency (QE). These features make the OG01A ideal for a wide range of consumer and industrial applications that need a global shutter to avoid motion blur, along with top NIR performance for low- and no-light conditions.

The OG01A is well-suited to multiple machine-vision applications, including AR/VR headsets, drones, robots, and simultaneous localization and mapping (SLAM), as well as facial authentication in smartphones and other consumer electronics. This technology is also ideal for automotive in-cabin driver state monitoring and eye tracking.

The 1.3 megapixel OG01A image sensor provides 1280 x 1024 resolution at 120 frames per second (fps) and 640 x 480 resolution at 240 fps in a compact 1/5 inch optical format.

The sensor's high modulation transfer function (MTF) enables sharper images with more detail, which is especially important for enhancing decision-making processes in machine vision applications. The OG01A also has a high NIR QE at 940 nm and 850 nm, enabling the sensor to see farther and better in low- and no-light conditions, which allows designers to use less IR LED light and achieve lower system-level power consumption. For AR/VR headsets, this reduces heat generation. For industrial and robotics applications, designers can use fewer IR LEDs for lower system cost, or use the same number of IR LEDs to achieve a greater image detection range.

Find out more at [www.ovt.com](http://www.ovt.com).




## Applications

- Machine Vision
- Industrial Automation
- Augmented and Virtual Reality
- Gaming
- Biometric Authentication
- Drones
- 3D Imaging
- Industrial Bar Code Scanning

## Product Features

- 2.2  $\mu\text{m}$  x 2.2  $\mu\text{m}$  pixel with PureCel<sup>+</sup>Plus-S Global Shutter and Nyxel<sup>+</sup> technology
- automatic black level calibration (ABLC)
- programmable controls for:
  - frame rate
  - mirror and flip
  - cropping
- support output formats: 8/10-bit RAW
- fast mode switching
- supports horizontal and vertical 2:1 and 4:1 monochrome subsampling
- supports 2x2 monochrome binning
- programmable ROI
- 1/2-lane MIPI serial output interface
- 1/2 trio CPHY interface, up to 1.1 Gbps/trio
- support for image sizes:
  - 1280 x 1024
  - 640 x 480
- two on-chip phase lock loops (PLLs)
- built-in strobe control
- support for multi-sensor mode operation
- programmable ROI
- embedded temperature sensor

# OG01A1B




## Ordering Information

- OG01A1B-GA5A-Z (b&w, chip probing, 150  $\mu\text{m}$  backgrinding, reconstructed wafer with good die)

## Product Specifications

- active array size: 1280 x 1024
- power supply:
  - analog: 2.8V (nominal)
  - core: 1.2V (nominal)
  - I/O: 1.8V (nominal)
- power requirements:
  - XSHUTDOWN: 30  $\mu\text{A}$
- temperature range:
  - operating: -30°C to +85°C junction temperature
  - stable image: 0°C to +60°C junction temperature
- output interface: 1/2-lane MIPI serial output
- output formats: 8/10-bit RAW
- lens size: 1/5"
- input clock frequency: 6 - 64 MHz
- lens chief ray angle: 31.3° non-linear
- maximum image transfer rate:
  - 1.3MP (1280x1024): 120 fps
  - VGA (640x480): 240 fps
- minimum exposure time: 1 row period
- maximum exposure time:
  - frame length - 14 row periods, where frame length is set by registers [0x380E, 0x380F]
- pixel size: 2.2  $\mu\text{m}$  x 2.2  $\mu\text{m}$
- image area: 2851.2  $\mu\text{m}$  x 2288  $\mu\text{m}$
- die dimensions:
  - COB: 4100  $\mu\text{m}$  x 4300  $\mu\text{m}$
  - RW: 4150  $\mu\text{m}$  x 4350  $\mu\text{m}$

## Functional Block Diagram

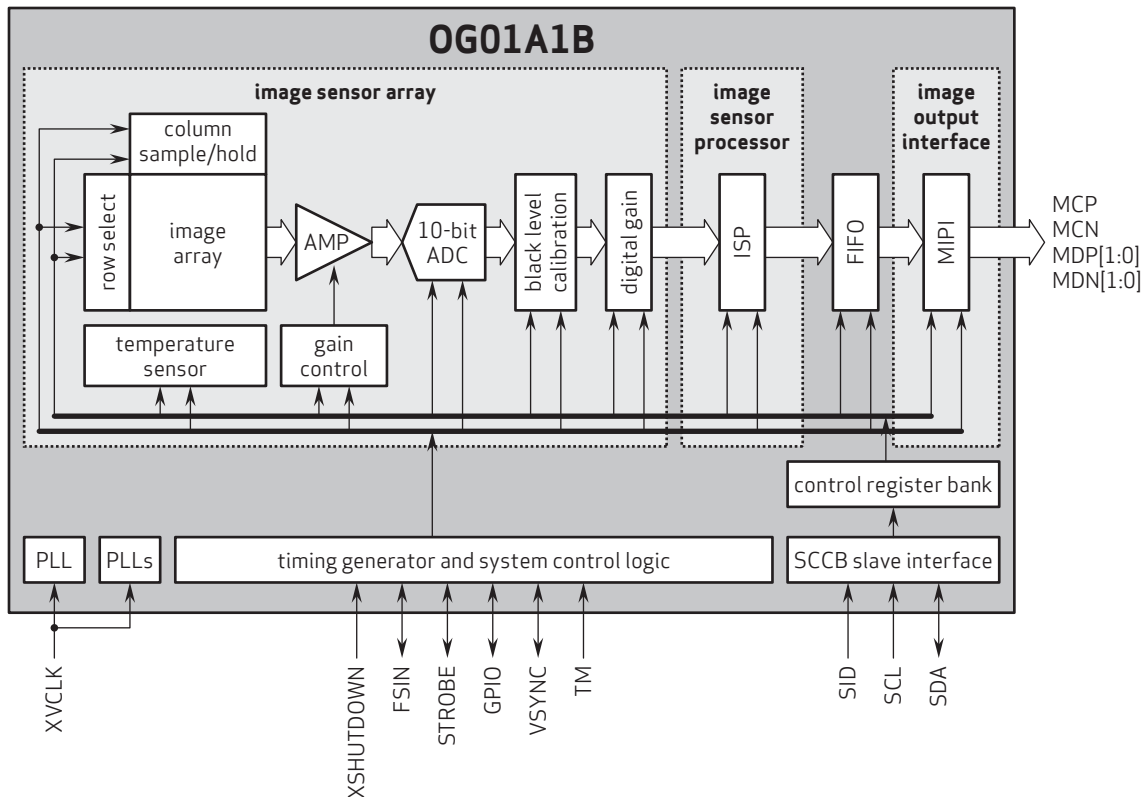

4275 Burton Drive  
Santa Clara, CA 95054  
USA

Tel: +1 408 567 3000  
Fax: +1 408 567 3001  
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo, PureCel and Nyxel are registered trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



OmniVision