

# OH02A1S 1080p product brief



## Medical RGB-IR Image Sensor Reduces Endoscope Size, Cost, Power and Heat by Half



available in  
a lead-free  
package

OmniVision's OH02A1S is the world's first RGB-IR medical image sensor, providing simultaneous white-light RGB captures and infrared monochrome captures in a single CMOS sensor for cancer diagnosis and treatment. While endoscopic precancer and cancer detection procedures are performed using IR light, surgeons also need RGB light to confirm any abnormalities detected using infrared. Previously, this could only be accomplished by integrating two independent imager sensors, which resulted in endoscopes with a larger size, higher cost and higher power consumption, thereby excessively heating the tip of the endoscope.

Built on OmniVision's PureCel® pixel architecture, the OH02A1S offers 4x4 binning for the highest image quality, high quantum efficiency for excellent low-light performance, and a high dynamic range for clarity in scenes with widely contrasting bright and dark areas. The sensor can provide 1080p (1920x1080) resolution at 60 frames per second (fps) or 720p (1280x720) at 90 fps, via a 2-lane MIPI serial output. The OH02A1S also integrates 2 kilobits of one-time programmable memory on-chip. It consumes just 90 milliwatts at full power, generating less heat for greater patient comfort.

With the OH02A1S, both IR and RGB images can now be captured using a single chip, allowing the surgeon to switch between high quality RGB and IR in real time, or to display both images simultaneously on one (overlay) or two (side-by-side) monitors. Additionally, the smaller size and reduced heat allow the endoscope to reach much farther into the body than was previously possible with larger-outer-diameter, two-imager designs. Alternatively, designers can use the extra space to add more or larger illumination (fiber or LED), or a larger working channel for endoscopic tools.

The OH02A1S image sensor is available today in an RW package and the chip-scale package will be available based on project demand.

Find out more at [www.ovt.com](http://www.ovt.com).



## Applications

- Medical Endoscopes
- Veterinary Endoscopes
- Dental Equipment
- Industrial Endoscopes

## Product Features

- 1.4  $\mu\text{m}$  x 1.4  $\mu\text{m}$  pixel
- optical size of 1/6"
- programmable controls for:
  - frame rate
  - mirror and flip
  - cropping
  - windowing
- supports output formats:
  - 10-bit RAW RGB-Ir
- supports images sizes:
  - 1080p (1920x1080)
  - 720p (1280x720)
- standard serial SCCB interface
- up to 2-lane MIPI serial output interface (supports maximum speed up to 1000 Mbps/lane)
- embedded 2 kilobits of one-time programmable (OTP) memory for customer use
- add staggered HDR raw data output
- interleave row high dynamic range (iHDR) output
- programmable I/O drive capability

# OH02A1S




## Ordering Information

- OH02A1S-GA5A (RGB-Ir, chip probing, 150  $\mu\text{m}$  backgrinding, reconstructed wafer with good die)

## Technical Specifications

- active array size: 1920 x 1080
- maximum image transfer rate:
  - 1080p: 60 fps
  - 720p: 90 fps
- power supply:
  - core: 1.2V
  - analog: 2.8V
  - I/O: 1.8V
- power requirements:
  - active: 90 mW
  - standby: 210  $\mu\text{A}$
  - XSHUTDN: 0.6  $\mu\text{A}$
- output format: 10-bit RAW RGB-Ir
- lens size: 1/6"
- temperature range:
  - operating: -30°C to +85°C junction temperature
  - stable image: 0°C to +60°C junction temperature
- lens size: 1/6"
- lens chief ray angle: 33° non-linear
- scan mode: progressive
- pixel size: 1.4  $\mu\text{m}$  x 1.4  $\mu\text{m}$
- image area: 2728.8  $\mu\text{m}$  x 1549.8  $\mu\text{m}$
- die dimensions:
  - COB: 3825  $\mu\text{m}$  x 2889  $\mu\text{m}$
  - RW: 3875  $\mu\text{m}$  x 2939  $\mu\text{m}$

## Functional Block Diagram

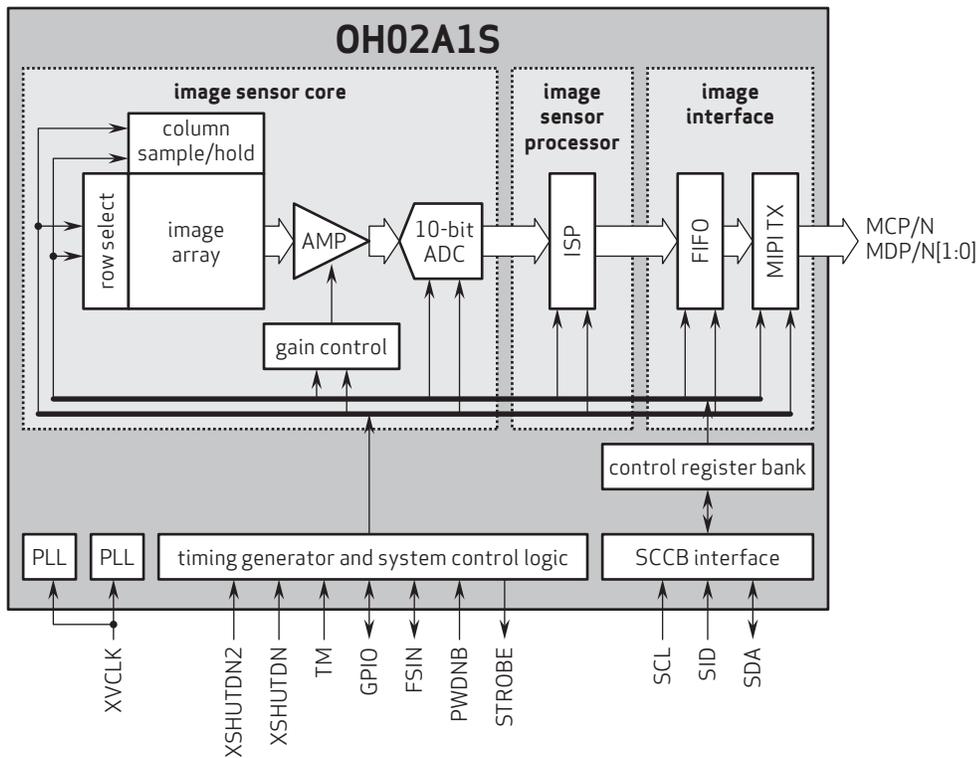

4275 Burton Drive  
Santa Clara, CA 95054  
USA

Tel: +1 408 567 3000  
Fax: +1 408 567 3001  
www.ovt.com

OmniVision reserves the right to make changes to their products or to discontinue any product or service without further notice. OmniVision, the OmniVision logo and PureCel are registered trademarks of OmniVision Technologies, Inc. All other trademarks are the property of their respective owners.



OmniVision